


Modification of the Home Power Adapter for FleetPC-6


To use the Home Power Adapter with the FleetPC-6, you have to modify the wiring of it.



First of all, open the screws of the plug and remove the cables from it.

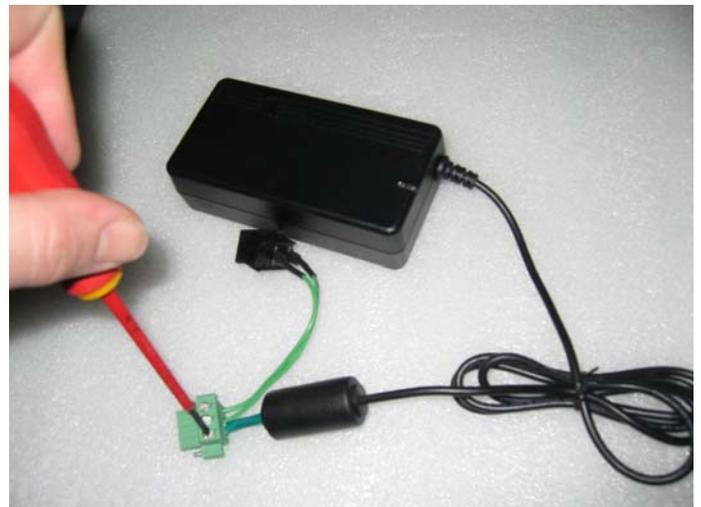


Now, +12 V and GND (grounding) have to be pulled apart slightly, because +12V and GND are on the left, and right side of the plug. (NOTE: Maybe you have to remove a little bit the isolation of the power cable.)

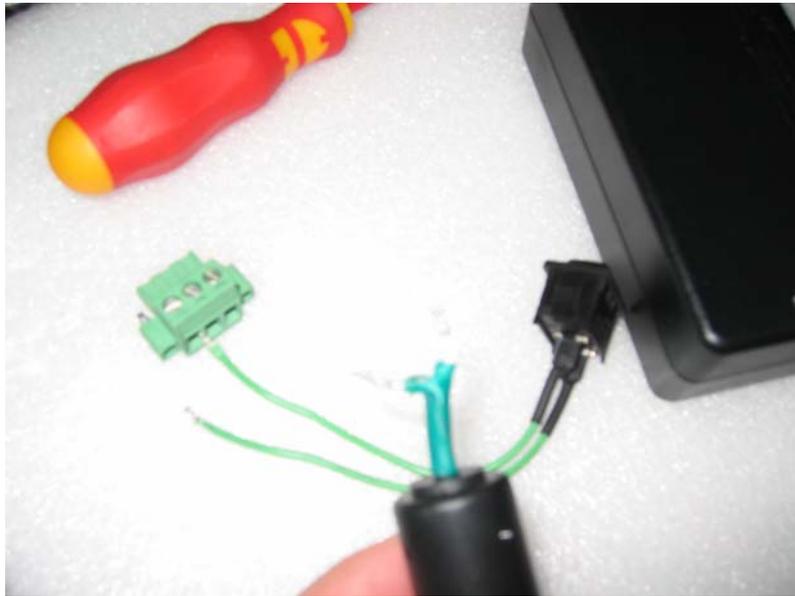


Now, screw down the first side of the power switch (ignition) in the middle of the connector.



The other side of the power switch, has to be connected together with the +12V cable on the left side of the plug.

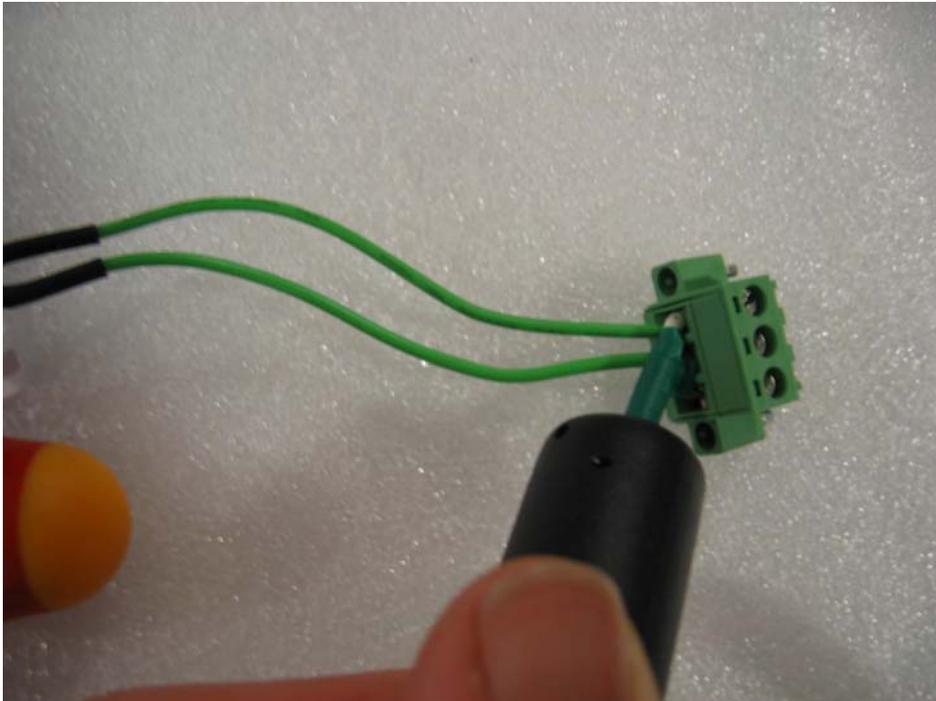

GND (grounding) has to be connected on the right side of the power connector.

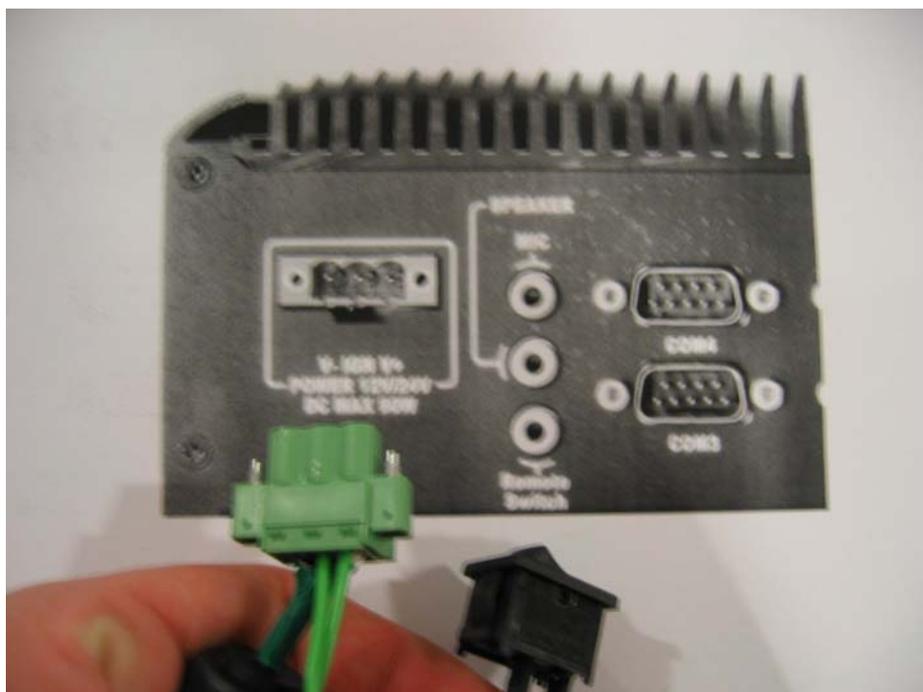

Finish.